

**TOPIC: -**

**INTRODUCTION TO GPS**



**Dr. SATYAPRIYA MAHATO**

**DEPARTMENT OF AMANAT SURVEY,**

**DR. SHYMA PRASAD MUKHERJEE UNIVERSITY, RANCHI.**

# INTRODUCTION TO GPS

- ❖ Introduction and Overview of GPS
- ❖ GPS Segments
- ❖ GPS Satellite constellation
- ❖ GPS control sites
- ❖ GPS services and uses

## Introduction and Overview of GPS

The Global Positioning System (GPS) is a satellite-based navigation system that was developed by the U.S. Department of Defense (DoD) in the early 1970s. Initially, GPS was developed as a military system to fulfill U.S. military needs. However, it was later made available to civilians, and is now a dual-use system that can be accessed by both military and civilian users. GPS provides continuous positioning and timing information, anywhere in the world under any weather conditions. Because it serves an unlimited number of users as well as being used for security reasons, GPS is a one-way-ranging (passive) system, that is, users can only receive the satellite signals.

GPS consists, nominally, of a constellation of 24 operational satellites. This constellation, known as the initial operational capability (IOC), was completed in July 1993. The official IOC announcement, however, was made on December 8, 1993. To ensure continuous worldwide

coverage, GPS satellites are arranged so that four satellites are placed in each of six orbital planes (Figure 1). With this constellation geometry, four to ten GPS satellites will be visible anywhere in the world, if an elevation angle of  $10^\circ$  is considered. As discussed, only four satellites are needed to provide the positioning, or location, information.

GPS satellite orbits are nearly circular (an elliptical shape with a maximum eccentricity is about 0.01), with an inclination of about  $55^\circ$  to the equator. The semi major axis of a GPS orbit is about 26,560 km (i.e., the satellite altitude of about 20,200 km above the Earth's surface). The corresponding GPS orbital period is about 12 sidereal hours (~11 hours, 58 minutes). The GPS system was officially declared to have achieved full operational capability (FOC) on July 17, 1995, ensuring the availability of at least 24 operational, non-experimental, GPS satellites. Since GPS achieved its FOC, the number of satellites in the GPS constellation has always been more than 24 operational satellites.

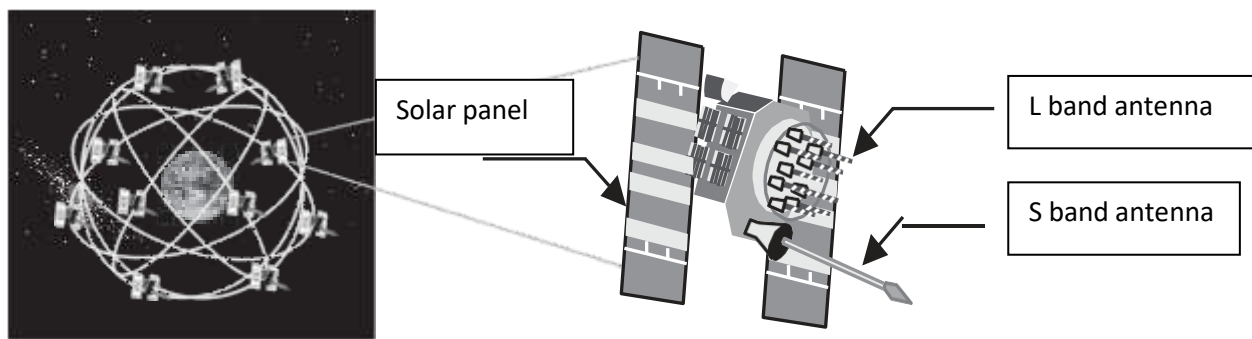


Figure 1 GPS Constellation

Source: <http://www.eso.org/public/outreach/eduoff/seaspace/docs/navigation/navgps/navgps-1.html>

## Why Use GPS

GPS has revolutionized the surveying and navigation fields since its early stages of development. Although GPS was originally designed as a military system, its civil applications have grown much faster. As for the future, it is said that the number of GPS applications will be limited only to one's imagination.

On the surveying side, GPS has replaced the conventional methods in many applications. GPS positioning has been found to be a cost-effective process, in which at least 50% cost reduction can be obtained whenever it is possible to use the so-called real-time kinematic (RTK) GPS, as compared with conventional techniques. In terms of productivity and time saving, GPS could provide more than 75% time saving whenever it is possible to use the RTK GPS method. The fact that GPS does not require inter visibility between stations has also made it more attractive to surveyors over the conventional methods. For those situations in which the GPS signal is obstructed, such as in urban canyons, GPS has been successfully integrated with other conventional equipment.

GPS has numerous applications in land, marine, and air navigation. Vehicle tracking and navigation are rapidly growing applications. It is expected that the majority of GPS users will be in vehicle navigation.

Future uses of GPS will include automatic machine guidance and control, where hazardous areas can be mapped efficiently and safely using remotely controlled vehicles. The recent U.S. decision to modernize GPS and to terminate the selective availability will undoubtedly open the door for a number of other applications yet to be developed.

## **GPS Segments**

GPS consists of three segments: (Figure 3)

- (i) Space segment,
- (ii) Control segment, and
- (iii) User segment

### **1. Space Segment:**

The space segment consists of the 24-satellite constellation introduced in the previous section. Each GPS satellite transmits a signal, which has a number of components: two sine waves (also known as carrier frequencies), two digital codes, and a navigation message. The codes and the navigation message are added to the carriers as binary bi-phase modulations. The carriers and the codes are used mainly to determine the distance from the user's receiver to the GPS satellites. The navigation message contains, along with other information, the coordinates (the location) of

the satellites as a function of time. The transmitted signals are controlled by highly accurate atomic clocks onboard the satellites.

Some high point of space segment are shown in figure 2

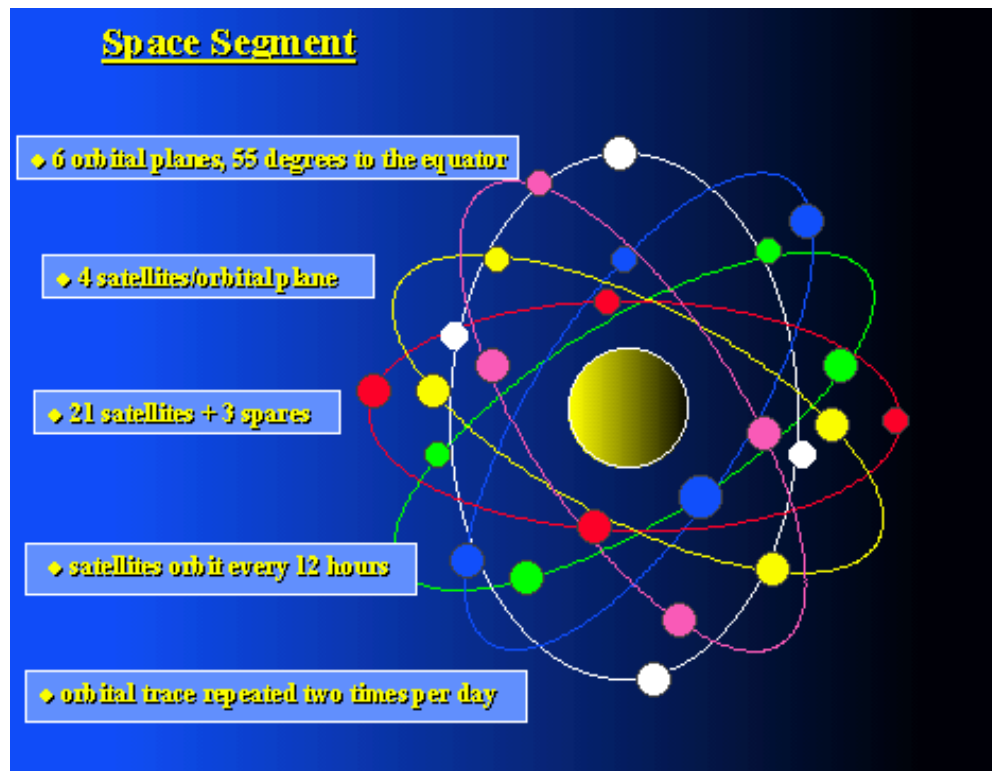


Figure 2 Space segment important points

## 2. Control Segment:

The control segment of the GPS system consists of a worldwide network of tracking stations, with a master control station (MCS) located in the United States at Colorado Springs, Colorado. The primary task of the operational control segment is tracking the GPS satellites in order to determine and predict satellite locations, system integrity, and behavior of the satellite atomic clocks, atmospheric data, the satellite almanac, and other considerations. This information is then packed and uploaded into the GPS satellites through the S-band link.

## 3. User Segment:

GPS user equipment varies widely in cost and complexity, depending on the receiver design and application. Receiver sets, which currently vary in price from approximately \$135 or less to \$30,000, can range from fairly simple devices that provide only basic positioning information to

complex multichannel units that track all satellites in view and perform a variety of functions. Most GPS receivers consist of three basic components:

- (1) An antenna, which receives the signal and, in some cases, has anti-jamming capabilities;
  - (2) A receiver-processor unit, which converts the radio signal to a useable navigation solution;
  - (3) A control/display unit, which displays the positioning information and provides an interface for receiver control.
- The user segment includes all military and civilian users. With a GPS receiver connected to a GPS antenna, a user can receive the GPS signals, which can be used to determine his or her position anywhere in the world. GPS is currently available to all users worldwide at no direct charge.

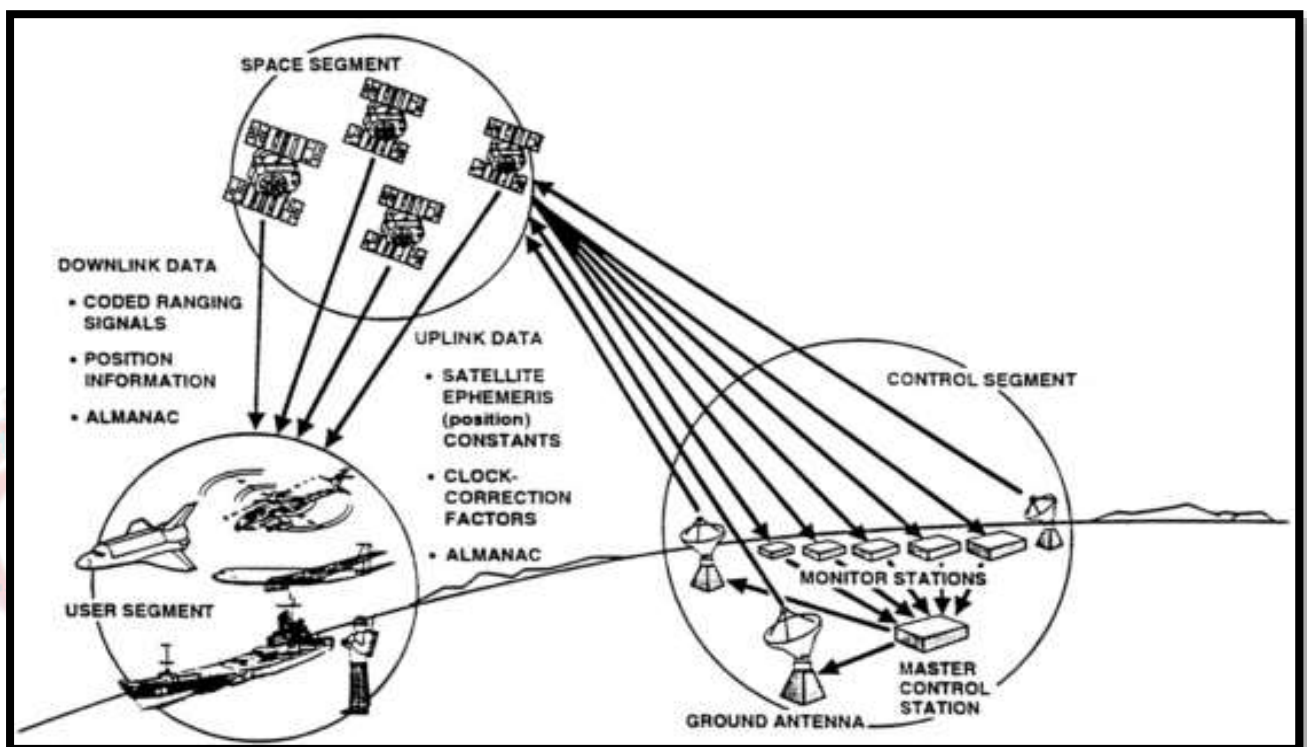


Figure 3 GPS Segments

Source: <https://www.nap.edu/read/9254/chapter/5>

## GPS Satellite generations

GPS satellite constellation buildup started with a series of 11 satellites known as Block I satellites (Figure 4). The first satellite in this series (and in the GPS system) was launched on February 22, 1978. Block I satellites were built mainly for experimental purposes. The

inclination angle of the orbital planes of these satellites, with respect to the equator, was  $63^\circ$ , which was modified in the following satellite generations. Although the design lifetime of Block I satellites was 4.5 years, some remained in service for more than 10 years. The last Block I satellite was taken out of service on November 18, 1995.

The second generation of the GPS satellites is known as Block II/IIA satellites (Figure 4). Block IIA is an advanced version of Block II, with an increase in the navigation message data storage capability from 14 days for Block II to 180 days for Block IIA. This means that Block II and Block IIA satellites can function continuously, without ground support, for periods of 14 and 180 days, respectively. A total of 28 Block II/IIA satellites were launched during the period from February 1989 to November 1997. Of these, 23 are currently in service. Unlike Block I, the orbital plane of Block II/IIA satellites are inclined by  $55^\circ$  with respect to the equator. The design lifetime of a Block II/IIA satellite is 7.5 years, which was exceeded by most Block II/IIA satellites. To ensure national security, some security features, known as selective availability (SA) and anti spoofing, were added to Block II/IIA satellites.

A new generation of GPS satellites, known as Block IIR (Figure 4). These replenishment satellites will be backward compatible with Block II/IIA, which means that the changes are transparent to the users. Block IIR consists of 21 satellites with a design life of 10 years. In addition to the expected higher accuracy, Block IIR satellites have the capability of operating autonomously for at least 180 days without ground corrections or accuracy degradation. The autonomous navigation capability of this satellite generation is achieved in part through mutual satellite ranging capabilities. In addition, predicted ephemeris and clock data for a period of 210 days are uploaded by the ground control segment to support the autonomous navigation. More features will be added to the last 12 Block IIR satellites under the GPS modernization program, which will be launched at the beginning of 2003. As of July 2001, six Block IIR satellites have been successfully launched.

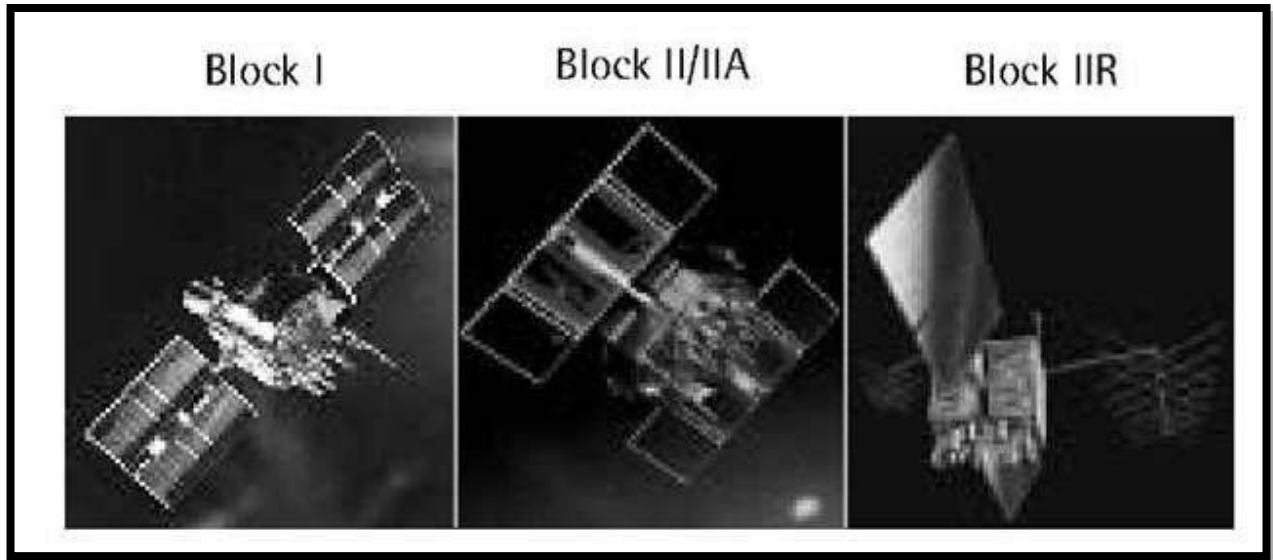


Figure 4 GPS satellite generation

Source: <http://what-when-how.com/gps/introduction-to-gps/>

Block IIR will be followed by another system, called Block IIF, consisting of 33 satellites. The satellite life span will be 15 years. Block IIF satellites will have new capabilities under the GPS modernization program that will dramatically improve the autonomous GPS positioning accuracy. The first Block IIF satellite is scheduled to be launched in 2005 or shortly after that date.

### **Current GPS Satellite Constellation**

The current GPS constellation consists of 31 Block II/IIA/IIR/IIR-M/IIF satellites. This makes the total number of GPS satellites in the constellation to be 31, which exceeds the nominal 24-satellite constellation by five satellites. All Block I satellite are no longer operational. The GPS satellites are placed in six orbital planes, which are labeled A through F. Since more satellites are currently available than the nominal 24-satellite constellation, an orbital plane may contain four or five satellites. As shown in Table 1.1, all of the orbital planes have five satellites, except for orbital plane C, which has only four. The satellites can be identified by various systems. The most popular identification systems within the GPS user community are the space vehicle number (SVN) and the pseudorandom noise (PRN); the PRN number will be defined later. Block II/IIA satellites are equipped with four onboard atomic clocks: two cesium (Cs) and two rubidium (Rb). The cesium clock is used as the primary timing source to control the GPS signal.



Block IIR satellites, however, use rubidium clocks only. It should be pointed out that two satellites, PRN05 and PRN06, are equipped with corner cube reflectors to be tracked by laser ranging (Table 1.1).

The operational GPS satellites are designated BLOCK II, BLOCK IIA, BLOCK IIR, BLOCK IIR-M, and BLOCK IIF.

The BLOCK II satellites, space vehicle numbers (SVN) 13 through 21, are the first full scale operational satellites developed by Rockwell International. Block II satellites were designed to provide 14 days of operation without contact from the Control Segment (CS). The Block IIs were launched from February 1989 through October 1990.

The BLOCK IIA satellites, SVNs 22 through 40, are the second series of operational satellites, also developed by Rockwell International. Block IIA satellites were designed to provide 180 days of operation without contact from the CS. During the 180-day autonomy, degraded accuracy will be evident in the navigation message. The Block IIAs were launched November 1990 through November 1997.

The design life of the Block II/IIA satellite is 7.3 years; each contains four atomic clocks: two Cesium (Cs) and two Rubidium (Rb); and have the Selective Availability (SA) and Anti-Spoof (A-S) capabilities. The Block II/IIA satellites were launched from Cape Canaveral Air Force Station, Florida, aboard the Delta II medium launch vehicle (MLV).

The BLOCK IIR satellites, SVNs 41 through 61, are the operational replenishment satellites developed by Lockheed Martin and will carry the GPS well into the next century. Block IIR satellites are designed to provide at least 14 days of operation without contact from the CS and up to 180 days of operation when operating in the autonomous navigation (AUTONAV) mode. Full accuracy will be maintained using a technique of ranging and communication between the Block IIR satellites. The cross-link ranging will be used to estimate and update the parameters in the navigation message of each Block IIR satellite without contact from the CS. The design life of the Block IIR satellite is 7.8 years; each contains three Rb atomic clocks and have the SA and A-S capabilities. Launching of the Block IIRs began in January 1997.

The BLOCK IIR-M satellites transmit a second civil signal L2C on the L2 frequency and the military M signal on the L1 and L2 frequencies. SVN 49 also transmits on the L5 frequency.

The BLOCK IIF satellites transmit all signals including on the L5 frequency intended for safety-of-life applications. Launching of the Block IIFs began in May 2010.

TABLE1.1 GPS Satellite Constellation as of July 2001

SEQUENCE	SVN	PRN	ORBIT AL	CLOCK	SEQUENC	SVN	PRN	ORBIT AL	CLOCK
II-2	13	2	B-3	Cs	II-21	39	9	A-1	Cs
II-4	19	19	A-5	Cs	II-22	35	5	B-4	Cs
II-5	17	17	D-3	Cs	II-23	34	4	D-4	Rb
II-8	21	21	E-2	Cs	II-24	36	6	C-1	Cs
II-9	15	15	D-5	Cs	II-25	33	3	C-2	Cs
II-10	23	23	E-5	Cs	II-26	40	10	E-3	Cs
II-11	24	24	D-1	Cs	II-27	30	30	B-2	Cs
II-12	25	25	A-2	Cs	II-28	38	8	A-3	Rb
II-14	26	26	F-2	Rb	IIR-2	43	13	F-3	Rb
II-15	27	27	A-4	Cs	IIR-3	46	11	D-2	Rb
II-16	32	1	F-4	Cs	IIR-4	51	20	E-1	Rb
II-17	29	29	F-5	Rb	IIR-5	44	28	B-5	Rb
II-18	22	22	B-1	Rb	IIR-6	41	14	F-1	Rb
II-19	31	31	C-3	Cs	IIR-7	54	18	E-4	Rb
II-20	37	7	C-4	Rb					

## Control Sites

The control segment of GPS consists of a master control station (MCS), a worldwide network of monitor stations, and ground control stations (Figure 5). The MCS, located near Colorado Springs, Colorado, is the central processing facility of the control segment and is manned at all times. There are five monitor stations, located in Colorado Springs (with the MCS), Hawaii, Kwajalein, Diego Garcia, and Ascension Island. The positions (or coordinates) of these monitor stations are known very precisely. Each monitor station is equipped with high-quality GPS receivers and a cesium oscillator for the purpose of continuous tracking of all the GPS satellites in view. Three of the monitor stations (Kwajalein, Diego Garcia, and Ascension Island) are also equipped with ground antennas for uploading the information to the GPS satellites. All of the monitor stations and the ground control stations are unmanned and operated remotely from the

MCS. The GPS observations collected at the monitor stations are transmitted to the MCS for processing. The outcome of the processing is predicted satellite navigation data that includes, along with other information, the satellite positions as a function of time, the satellite clock parameters, atmospheric data, satellite almanac, and others. This fresh navigation data is sent to one of the ground control stations to upload it to the GPS satellites through the S-band link. Monitoring the GPS system integrity is also one of the tasks of the MCS. The status of a satellite is set to unhealthy condition by the MCS during satellite maintenance or outages. This satellite health condition appears as a part of the satellite navigation message on a near real-time basis. Scheduled satellite maintenance or outage is reported in a message called Notice Advisory to Navstar Users (NANU), which is available to the public through, for example, the U.S. Coast Guard Navigation Center.

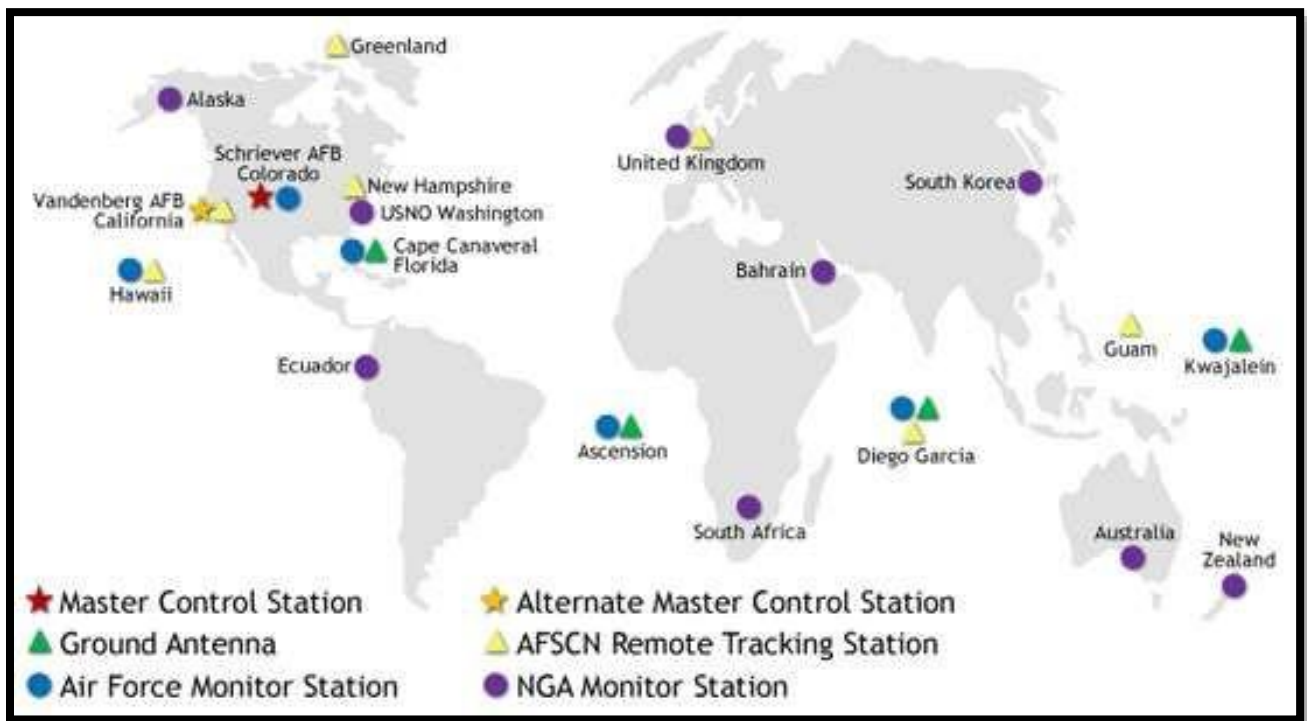


Figure 5 GPS control station

Source: <http://www.gps.gov/systems/gps/control/>

## **GPS: The basic idea**

The idea behind GPS is rather simple. If the distances from a point on the Earth (a GPS receiver) to three GPS satellites are known along with the satellite locations, then the location of the point (or receiver) can be determined by simply applying the well-known concept of resection. As mentioned before, each GPS satellite continuously transmits a microwave radio signal composed of two carriers, two codes, and a navigation message. When a GPS receiver is switched on, it will pick up the GPS signal through the receiver antenna. Once the receiver acquires the GPS signal, it will process it using its built-in software. The partial outcome of the signal processing consists of the distances to the GPS satellites through the digital codes (known as the pseudo ranges) and the satellite coordinates through the navigation message. Theoretically, only three distances to three simultaneously tracked satellites are needed. In this case, the receiver would be located at the intersection of three spheres; each has a radius of one receiver-satellite distance and is centered on that particular satellite (Figure 6). From the practical point of view, however, a fourth satellite is needed to account for the receiver clock offset. The accuracy obtained with the method described earlier was until recently limited to 100m for the horizontal component, 156m for the vertical component, and 340 ns for the time component, all at the 95% probability level. This low accuracy level was due to the effect of the so-called selective availability, a technique used to intentionally degrade the autonomous real-time positioning accuracy to unauthorized users. With the recent presidential decision of terminating the selective availability, the obtained horizontal accuracy is expected to improve to about 22m (95% probability level). To further improve the GPS positioning accuracy, the so-called differential method, which employs two receivers simultaneously tracking the same GPS satellites, is used. In this case, positioning accuracy level of the order of a sub centimeter to a few meters can be obtained. Other uses of GPS include the determination of the users velocity, which could be determined by several methods. The most widely used method is based on estimating the Doppler frequency of the received GPS signal. It is known that the Doppler shift occurs as a result of the relative satellite-receiver motion. GPS may also be used in determining the attitude of a rigid body, such as an aircraft or a marine vessel. The word attitude means the orientation, or the direction, of the rigid body, which can be described by the three rotation angles of the three axes of the rigid body with respect to a reference system. Attitude is determined by equipping the body with a minimum of three GPS receivers (or one special receiver) connected to three antennas, which are

arranged in a non straight line. Data collected at the receivers are then processed to obtain the attitude of the rigid body.

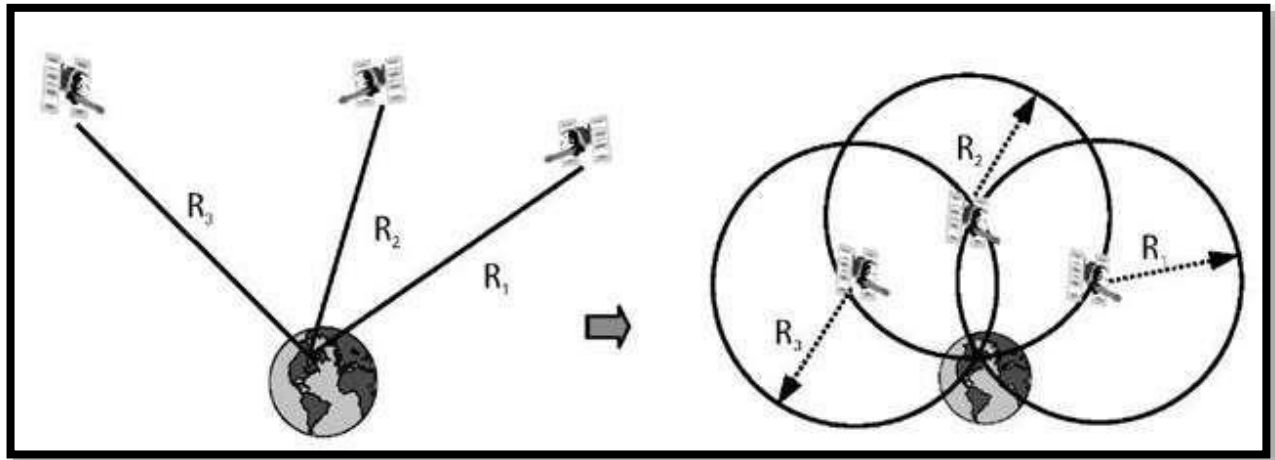


Figure 6 Basic idea of GPS

Source: <http://what-when-how.com/gps/introduction-to-gps/>

## GPS Positioning Services

GPS was originally developed as a military system, but was later made available to civilians as well. However, to keep the military advantage, the U.S. Department of Defense provides two levels of GPS positioning and timing services: the Precise Positioning Service (PPS) and the Standard Positioning Service (SPS) .

PPS is the most precise autonomous positioning and timing service. It uses one of the transmitted GPS codes, known as P(Y)-code, which is accessible by authorized users only. These users include U.S. military forces. The expected positioning accuracy provided by the PPS is 16m for the horizontal component and 23m for the vertical component (95% probability level).

SPS, however, is less precise than PPS. It uses the second transmitted GPS code, known as the C/A-code, which is available free of charge to all users worldwide, authorized and unauthorized. Originally, SPS provided positioning accuracy of the order of 100m for the horizontal component and 156m for the vertical component (95% probability level). This was achieved under the effect of selective availability. With the recent presidential decision of discontinuing the SA, the SPS autonomous positioning accuracy is presently at a comparable level to that of the PPS.

There are two levels of service provided, the Standard Positioning Service (SPS) and the Precise Positioning Service (PPS). The PPS is defined as that functionality that needs encryption data and the SPS as any use that needs no encrypted data. In general this means the SPS is the civilian service and the PPS is the military service.

There is hardware on the satellites to provide two aspects that distinguish the two services, the Anti-Spoofing or AS function and the Selectivity Availability or SA function. The SA function degraded the accuracy of the solutions to a standalone user. It was essentially negated by Differential GPS. SA was turned off by presidential order in May 2000. It is unlikely to ever return.

Anti-Spoofing is designed to prevent an adversary from generating a signal that will be mistaken for a valid satellite signal. There are two different navigation codes used for generating the effective pulses, the CA or clear/acquisition code and the P/Y or precision code. The CA and P codes are public knowledge. The signal that is the P-code is encrypted by the AS function before it is transmitted. It is then re-labeled as the Y-code. The military uses receivers that accept cryptographic keys that allow the use of the Y-code (These keys were also used to remove the SA effects). By using only the Y-code in a conflict situation the possibility of spoofing a military receiver is essentially zero. There are other things an adversary can do however, such as jamming.

There are two frequencies broadcast by the GPS satellites. These are called the L1 at 1575 MHz and L2 at 1227 MHz. The L1 signal is thought of as the measurement signal. This measurement goes through the ionosphere, a region between about 100 and 1000 km above the earth. Passage through the ionosphere adds a systematic error to the ranges. However, this error can be removed to the millimeter level using the L2 signal. This is the primary function of the L2 signal. The P/Y codes are on both frequencies. The CA, or civilian, signal is only on L1. Therefore, civilian users would normally be affected by the ionospheric error.

The use of DGPS effectively illuminates this error over a significant area, out to 50 to 500 km depending of many factors. In addition, the civilian receiver manufactures have developed several methods of tracing the L2 signal despite it being encrypted. (This does not affect the anti-

spoofing value of the encryption so the military is not worried about this development.) This L2 tracking was previously available only on expensive receivers used for survey and other precision applications. It is becoming available on more inexpensive receivers now.

As part of the agreement that led to the termination of the SA function, newer satellites will have a new broadcast frequency called L5. This signal is principally intended to remove the ionospheric error for the civilians. It will have an unencrypted range code.